

MPS Meeting Presentation System



Introduction

MPS, Meeting Presentation System, not only features the function of **freely conversations** among all of the participators in the meeting, but also of the **real-time VGA signal projection** from the notebooks of the participants to make the presentation public obtaining a more efficient and interactive conference discussion. Additionally, MPS integrates with PTZ Camera Controller, **automatic positioning camera system**, **automatically focus the reporter(s) for video-recording** and support fixed-point photography for 8 cameras at most.


The output of projection in the meeting even could be recorded and saved by the utility of HD Media Recorder. In the meantime, the recorded files could be **live-broadcasted** and reviewed by **video-on-demand mode** allowing the remote participants to join and access the conference without any miss.



Features

- Easy & instant laptop projection and microphone speaking without reluctant settings or software installation
- Simple & practical master management to prohibit or allow client's projection and speaking.
- Optional dual-masters' controls to support more slaves up to 40 units. Each one of the two masters is obliged to control the projection and speaking of participants.
- Automatically focus the reporter(s) for video-recording by integrating PTZ Camera Controller, automatic positioning camera system.
- Live broadcasting and record the whole conference proceeding including reporter' video-tapping, speaking and laptop's presentation by combining with HD Media Recorder. What's more, it can allow users to access the recorded files(VGA& video images) by video on demand function(VOD).
- Supports resolution of XGA, SXGA, UXGA, WXGA, WSXGA/ WXGA+
- High-quality video signal promised by using STP-CAT5E Cable transmission

Application

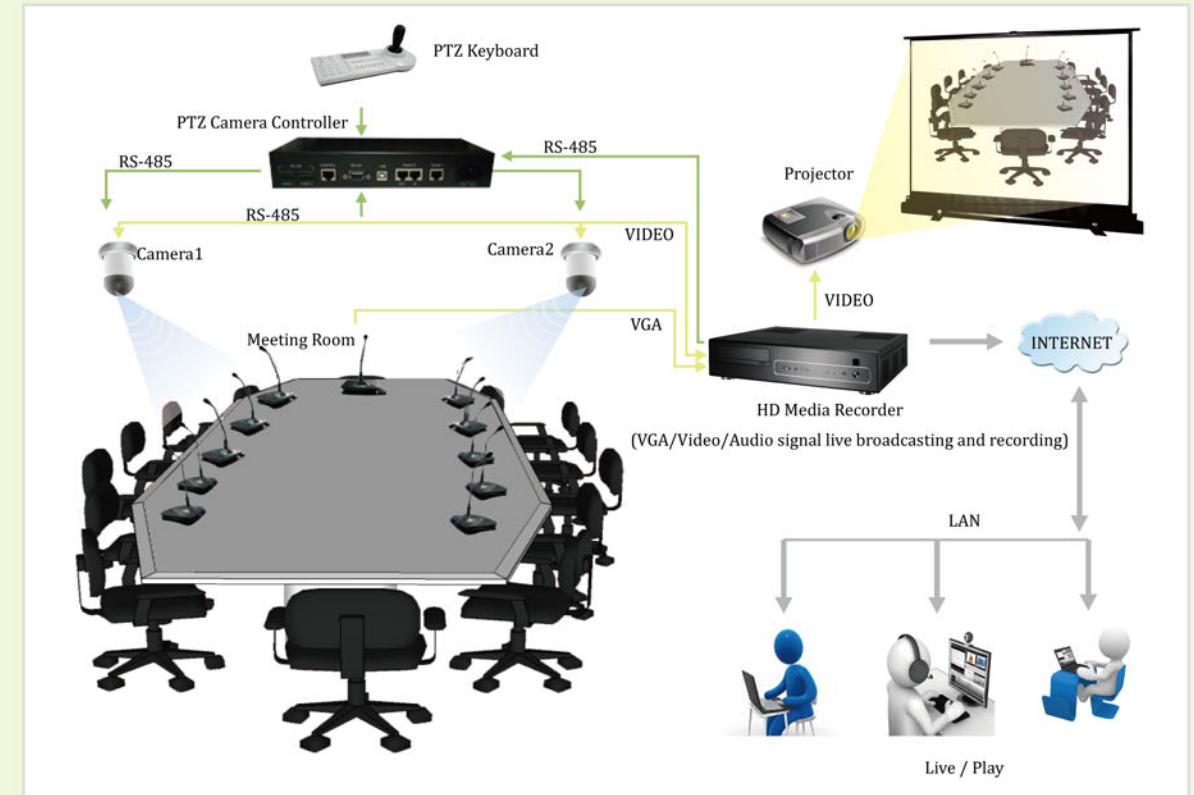

Component



Item	Model No.	Description
Master Unit	MPS-308B	Master unit for master to speak & project and control the participants' speaking & projection.
Slave Unit	MPS-108B	Slave Unit for participants to speak & project .
Receiver	PTP-108B1	VGA/Audio receiver connecting to projector to extend VGA/Audio signal in 60 meters.
MPS Box	MPS-900(Optional)	Interface box to connect two units of MPS-308 to support more slave units for 40pcs at most.
PTZ Camera Controller	PCC-900(Optional)	Automatic positioning camera system to automatically focus on the reporter(s) for video -recording
HD Media Recorder	HD-2000(Optional)	Live broadcasting and recording the VGA/Video/Audio signal in the conference.
Bus Cable	STP CAT5E	Shield Twisted Pair Category 5E Cable to connect all the system.