

VPS-Mini2

Video Presentation System



Feature

4-1 Split Screen Projection

Allow maximum 4 users to project on the same screen at the same time.

Plug & Play

With Plug & Play function, NB Video Presentation System can easily connect your PC/NB and project immediately.

High Compatibility


Compatible with Windows series OS such as Windows XP/Vista/7, Windows Mobile 5/6, Mac OSX 10.5 and above

Projection Quality Management

Option to have better image-quality or faster-performance projection.

High Efficiency

Fastest projection speed in the world which can reach 25-30fps.

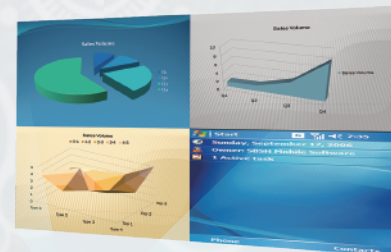

Specification

Standards	IEEE 802.11b/g/n 2.4GHz IEEE 802.3(10BASE-T)/IEEE 802.3u(100BASE-TX)
Wireless channel	11(US, Canada); 13(Europe); 14(Japan)
Data Rate	Wireless: Up to 150Mbps
Protocol	TCP/IP
IP configuration	Automatic: DHCP Manual: Static IP address
Management:	Web-based configuration
Security	IEEE Standard 64/128 bit WEP/WPA/WPA2 PSK
Wireless Link Coverag	Up to 300 feet/100 meters, depends on environment
Supported PC/Laptop Resolution	SVGA (800x600) / XGA (1024x768) / SXGA (1280x1024) WXGA (1280x768) / WSXGA (1440x900, 1600x1024) / UXGA (1600x1200) WUXGA (1920x1200) / QXGA (2048x1536) / Others
Supported Output Resolution	SVGA (800x600) / XGA (1024x768) / WXGA(1280x768) / WXGA+(1280x800)
Supported Windows Account Right	Administrators, Limited User, Guest
Supported Operation System	Windows XP/Vista/7, Windows Mobile 5/6, Mac OSX 10.5 and above
Power	External Power adaptor 5V DC input 1.2A
Interface	15Pin VGA / Reset Button
LED	Power
Mechanical	Dimension: 92.3 x 40 x 22 mm Weight: 52.2 g